



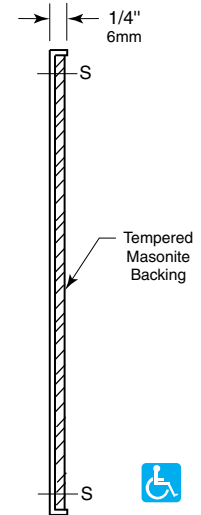

Technical Data

**FRAMELESS
STAINLESS STEEL
MIRROR**

**B-1556
SERIES**

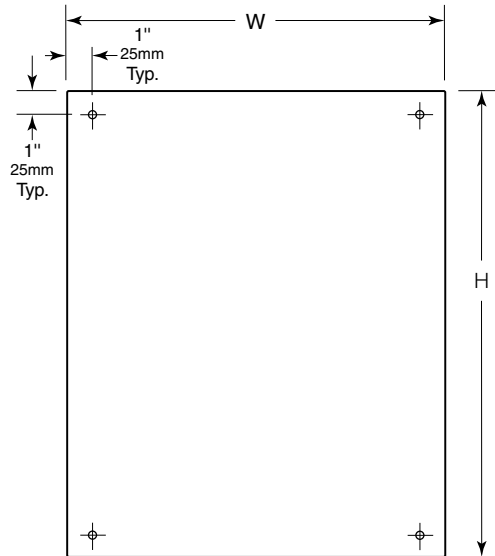

STANDARD B-1556 SERIES MIRRORS

Model No.	Overall Size		Number of Mounting Screws
	(W)	(H)	
B-1556 1824	17-1/2" (445mm)	23-1/2" (597mm)	4
B-1556 1830	17-1/2" (445mm)	29-1/2" (749mm)	4
B-1556 2436	23-1/2" (597mm)	35-1/2" (902mm)	4

Recommended Mounting Height Off Floor
for Universal / Accessible Design
40" Max. 1015mm

Designer's Notes:

1. Special-order sizes available on request.
2. Maximum size mirror available, 48" x 36" (122 x 91cm) or 36" x 48" (91 x 122cm); minimum size, 12" x 12" (30 x 30cm).
3. Overall width and height of custom 1556-series mirrors will be 1/2" (12mm) smaller than dimension specified.

MATERIALS:

Mirror — 18-8, type-304, 20 gauge (0.9mm) stainless steel polished to a No. 8 mirror finish. Mirror has 1/4" (6mm) return.

Backing — 1/4" (6mm) thick tempered masonite.

INSTALLATION:

Mount mirror on wall with four #8 oval head screws, furnished by manufacturer, at points indicated by an S. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws furnished. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws furnished, or provide 1/8" (3mm) toggle bolts or expansion bolts.

SPECIFICATION:

Frameless stainless steel mirror shall be 18-8, type-304, 20-gauge (0.9mm) stainless steel polished to a No. 8 mirror finish. Mirror shall have 1/4" (6mm) return concealing 1/4" (6mm) tempered masonite backing. Four corner countersunk holes provide flush fit of mounting screws with mirror surface.

Mirror shall be Model B-1556 _____ (insert width and height) of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.